


## Prestressed Concrete Sleeper B 70 W with Conductor Rail Support for Rail fastening W

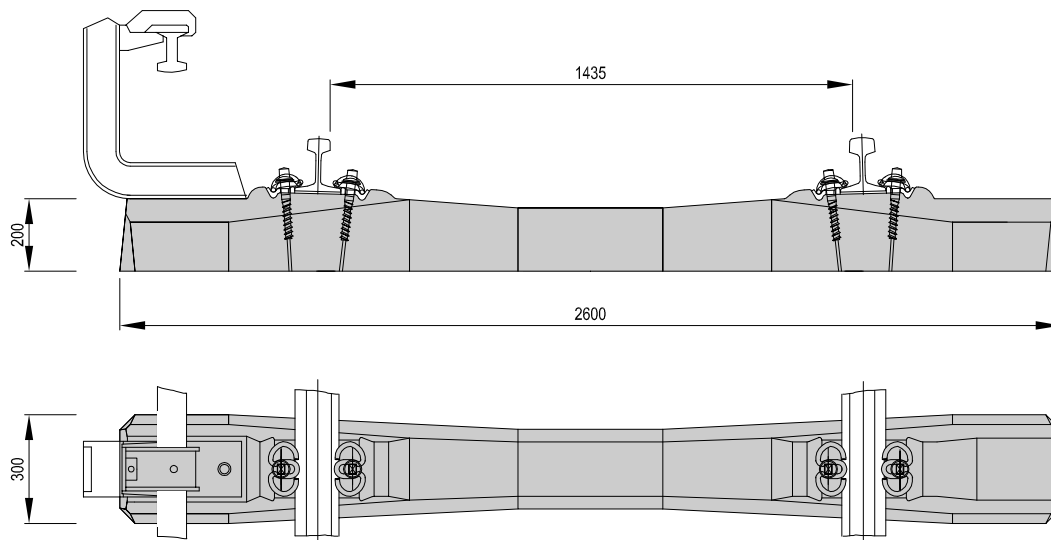

All dimensions in mm

Field of application:	Urban Transit
Permissible wheel set load:	250 kN
Rail inclination:	1:40
Track gauge:	1435 mm
Rail fastening system:	W 14
Rail:	49 E 1, 54 E 3 rail foot width 125 mm
Weight:	With rail fastening system, approx. 300 kg
Can be delivered for all conductor rail systems	
Can also be delivered with sleeper pads to lower the stress on the ballast. Sleeper pads provide vibration protection preserve the ballast under the tracks and lengthen the service life of the track.	
Produced according to DIN EN 13230 / Berlin urban railway version according to Deutsche Bahn standard DBS 918 143	